



UCDSTD-PR



UCTSTD-PR

ONE YEAR LIMITED WARRANTY

FSHS, Inc., warrants your under sink Filter System, to be free of defects in material and workmanship, for a period of three years, under normal use, within the operating conditions listed below. To resolve any warranty problems, you must first contact your local dealer, they in turn will contact the factory. Upon proof of purchase, *FSHS, Inc.*, will repair or replace, at the factory, the defective part or unit, and return it to your local dealer. Freight to and from the factory is to be paid by the buyer. The Pre and Post filter cartridges are warranted for manufacturers defects only and not for taste and odor problems. The membrane is warranted separately as stated below. *FSHS, Inc.*, limits the faucet warranty to a faucet repair kit which can be installed by the local dealer or the buyer. Any accessories, such as pumps and motors, shall be warranted by the manufacturer of these parts.

Standard Operating Conditions

Maximum feed water pressure	100psi	100psi
Water temperature	40-85F	40-100F
pH	3-9	3-11
Hardness	10-12 grains	10-12 grains

THERE ARE NO OTHER WARRANTIES EITHER EXPRESSED OR IMPLIED AND THERE IS NO LIABILITY FOR CONSEQUENTIAL DAMAGES OF ANY NATURE OR KIND.

SERIAL# _____

INSTALLATION INSTRUCTIONS

1. Place the filters in the unit. (Some units come with the filters installed, others have a bag with the filters in them.) The white sediment and the carbon filter should be put in the vertical 10" housings.

2. Locate cold water line under the sink.

3. Assemble saddle valve on cold water line. Turn the pipe clamp adjustment plate to fit the contour of the pipe. Tighten the bolt so the saddle valve is attached firmly to the pipe.

4. Faucet hole in sink. The faucet must be positioned with aesthetics, function and convenience in mind. Ample flat area is required for the faucet base, so the base nut can be tightened. Conditions may be present that would eliminate the need to drill a hole.

A. A hole previously drilled, covered by a chrome hole cover. Remove the cover and install faucet.

B. A spray hose that is either not functioning or desired. Remove the spray hose and plug the outlet under the main faucet. Install faucet.

Sink Drilling. The sink drilling process requires a certain amount of caution and forethought. Porcelain enameled sinks can be chipped if care is not exercised. Here are two suggested methods.

I. Drill carefully using a high speed drill and a 7/16" carbide tip drill bit.

II. Using a carbide grinding wheel, grind away the porcelain where the 7/16" is to be drilled. Drill a 7/16" hole through the metal.

CAUTION: Do not allow metal shavings to remain on porcelain surface of the sink for any length of time. The metal chips will stain the sink and are very hard to remove.

5. Faucet installation. Remove parts from faucet package. Place chrome plate, then large rubber washer on faucet stem. Slide stem through hole in sink. Place large washer, lock washer and nut on stem and tighten securely.

6. Attach product line to faucet. Place brass nut over the tubing. Place plastic ferrule on tube. Insert plastic tube support. Secure nut to base of faucet, making sure tube does not slide out.


7. Attach supply line to saddle valve using .

8. Turn supply saddle valve closed tightly to pierce pipe. Open slowly to make sure fittings are secure. Open valve completely and check for leaks.

NOTICE: Your new equipment may be shipped with food quality preservatives.

These should be flushed before use. Do not drink the 5 gallons of water. Although it will not hurt you it tastes bitter. The unit should be checked periodically for leaks during this time.

UCTSTD-PR

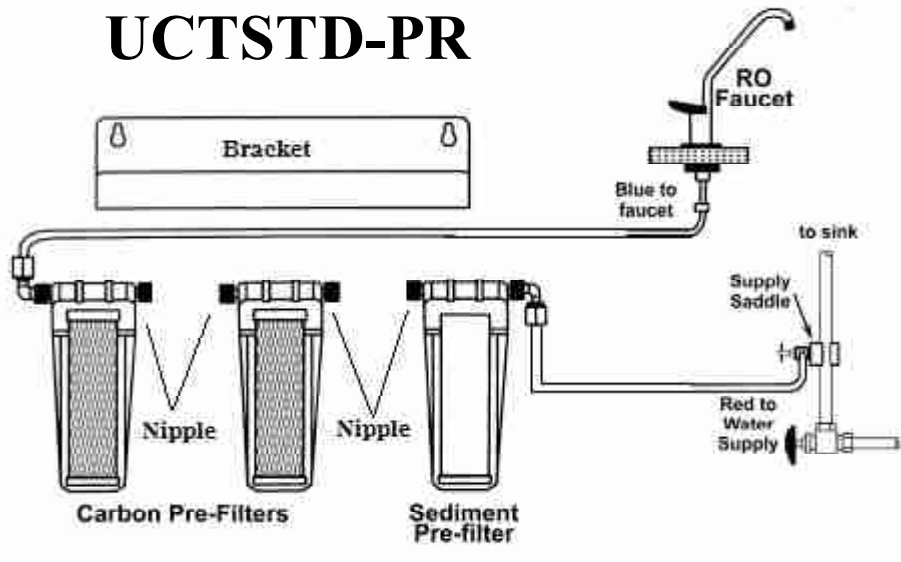

UCDSTD-PR

